




# RJ45 UTP CAT6 CONNECTOR PLUG

DIMENSIONS (mm):

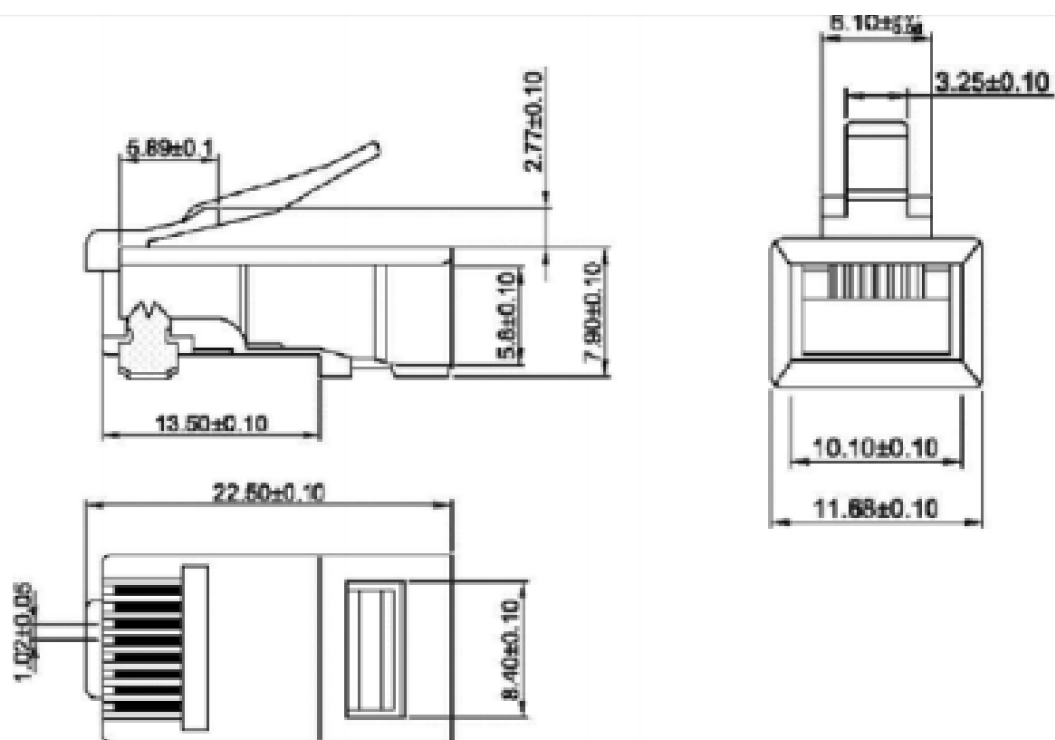

## QUICK SPECS

|                        |                                                          |
|------------------------|----------------------------------------------------------|
| BRAND                  | KYO ELECTRIC                                             |
| SHIELDING              | NO                                                       |
| CONTACT MATERIAL       | PHOSPHOR BRONZE                                          |
| CONTACT PLATING        | 1.27 um gold                                             |
| HOUSING MATERIAL       | PC                                                       |
| MAX VOLTAGE            | 250V 2A, AC                                              |
| DIELECTRIC WITHSANDING | 500V, AC                                                 |
| INSULATION RESISTANCE  | >100                                                     |
| CONTACT RESISTANCE     | <0.02 OHM                                                |
| TENSILE STRENGTH       | 80N                                                      |
| MATING CICLES          | >200                                                     |
| TEMPERATURE RANGE      | -20 to +85°C                                             |
| MAX CONDUCTOR DIAMETER | 23AWG, 22AWG UPON REQUEST                                |
| APPLICATION            | VALID FOR BOTH RIGID INSTALLATION CABLES / STRANDED WIRE |
| FLAMMABILITY RATING    | UL94V0                                                   |
| COLOUR                 | Transparent (colored upon request)                       |
| OTHER                  | ROHS COMPLIANT                                           |

### KYO ELECTRIC

C/María Moliner 2  
24009 León  
Tel: 987 79 52 01  
[contacto@kyoelectric.es](mailto:contacto@kyoelectric.es)

KYO ELECTRIC HK COMPANY LTD.  
Central Tower, 28 Queen's Road,  
Central, Hong Kong

Kyo Electric and the logo are registered trademarks.