


SC Fast connector Specification

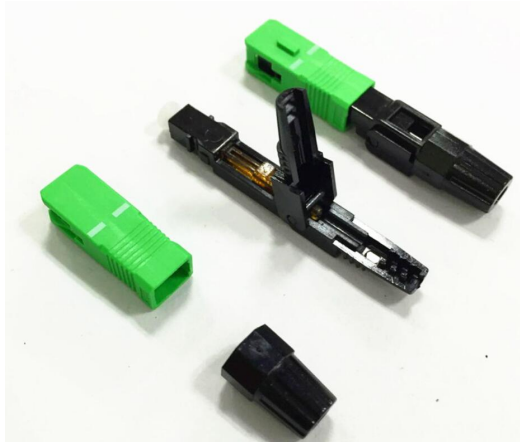

Series	SC/APC SC/UPC	
Applicable Cable	Φ 3*2 Rubber-insulated wire	Φ3.0 Fiber
Fiber Diameter	125μm	125μm
Coating Diameter	250μm	250μm
Fiber Mode	SM OR MM	SM OR MM
Installation Time	≤40S	≤40S
Construction Site Installation Rate	≥99%	≥99%
Insertion Loss	≤0.5dB(typical value≤0.8dB)(1310nm or 1550nm)	≤0.5dB(typical value≤0.8dB)(1310nm or 1550nm)
Return Loss	45dB(average 50dB)	45dB(average 50dB)
Tensile Strength	>30	>20
Working Temperature	-40°C~+70 °C	-40°C~+70 °C
Reusability	≥50	≥50
Normal Life	30 years	30 years